

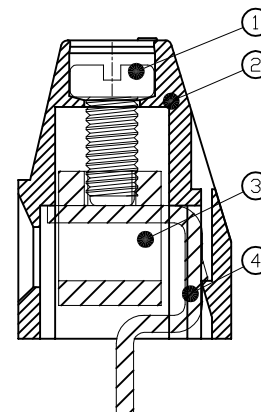
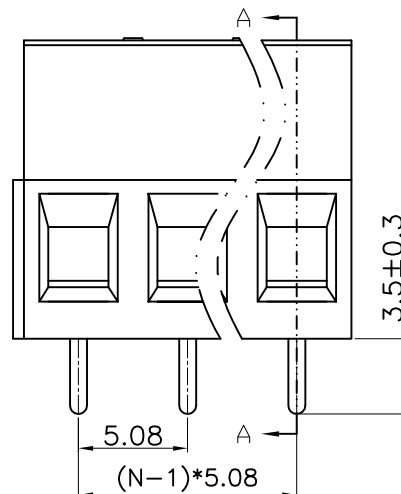
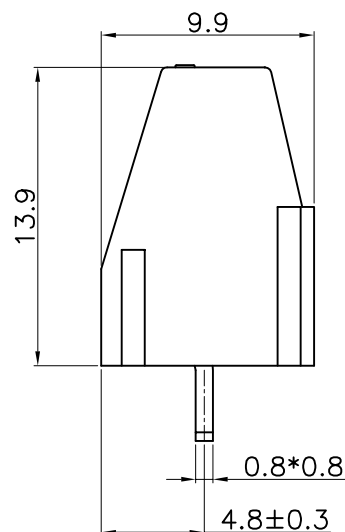


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2023.9.13	ZHANG	JIN

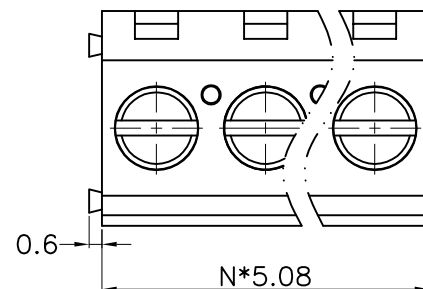

SECTION A-A

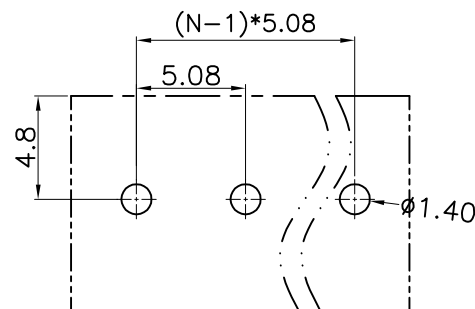

P.C.B.LAYOUT

- Material
 - ØScrew : M2.5 steel, Zinc plated, "—" slot type
 - ØHousing : PA66, UL94V-0
 - ØClamp : Copper alloy, Ni plated
 - ØPin header : Copper alloy, Tin plated


- Electrical

	UL	IEC
Rated voltage :	300V	250V
Rated current :	10A	18A
Contact Resistance:	20mΩ	
Insulation resistance:	500MΩ/1000V	
Withstanding Voltage :	AC2000V/1min	
Wire range:	24-12AWG 0.2-2.5mm ²	

- Mechanical
 - Operating temperature: -40℃~+105℃
 - Soldering temperature: 250℃±5/5sec
 - Torque: 0.4N.m (3.54Lb.in)
 - Strip length: 6-7mm

- Conform to REACH and RoHS

HOW TO ORDER
KF128V-5.08-XXP-1 X-XXXXX

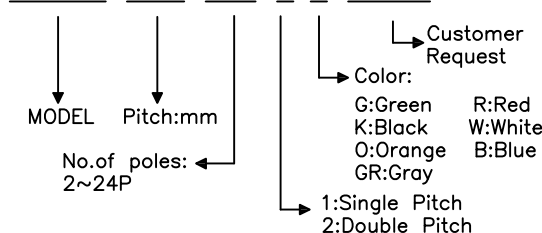

Pitch range			Nominal dimension range					PROJECTION		TITLE	KF128V-5.08-XXP-1X	
>0 ~6	>6 ~10	>10 ~24	>0 ~30	>30 ~60	>60 ~100	>100 ~150	0.1/10	UNIT	mm			
								SHEET SIZE	A4	SERIES		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2"				
DRAWING TYPE			CUSTOMER DRAWING						慈溪市凯峰电子有限公司 CIXI KAIFENG ELECTRONICS CO.,LTD			
SCALE		1:1	SHEET	1 OF 1								
DRAWING NO.		W15000562										

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD